



15' PREDATOR



Smooth underdecks make for more efficient mowing and less area for rust to begin. Deck rings are standard.

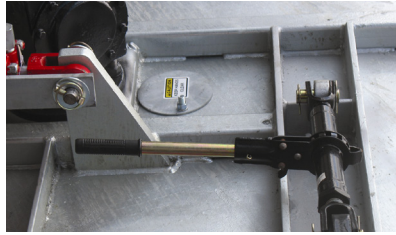

This unit is equipped with two 16,000 lb leveling ratchet jacks.



255 hp transfer gear box with 210 hp center and wing gearboxes.

CUTTING WIDTH
180"



* Gearbox ratings based on field performance.

** The Galvanized gloss level could vary from unit to unit. Modern Ag Products reserves the right to make changes and/or improvements in design and construction of parts or machines shown herein without notice or obligation.

SPECIFICATIONS

Cutting Width. 180"
 Transport Width. 90"
 Overall Width. 187"
 Overall Length. 180"
 Cutting Height 2"-15"
 Blade Overlap 6"
 Wing Lift Hydraulics. . . Standard
 Wing Flex. 90° Up/22° Down
 Jackstand Standard
 Hitch Swivel Clevis
 Blade Carrier Pan Stump Jumpers
 Horsepower
 Required (min). 50 hp

Main Gearbox
 or Divider Box*. 255 hp
 Outboard Gearbox
 or Center & Wings* . . . 210 hp
 Output Shaft Diameter. 2-3/8"
 Cut Capacity 3-1/2"
 Blade Tip Speed:
 Main or Center 540 15,268 FPM
 1000 15,072 FPM
 Wings 540 14,821 FPM
 1000 14,946 FPM
 Driveline Size:
 Main. Cat. 5
 Constant
 Veloc.

Outboard Center
 or Wings Cat. 4 w/Slip Clutch
 Deck Thickness. 3/16"
 Side Skirt. 1/4" x 10 1/4"
 Replaceable Skid
 Shoes Standard
 Front Safety Chains. . . Standard
 Rear Safety Deflectors Rubber Guard
 Standard with
 Chain Option
 Weight (Approx). 5600 lbs.
 Standard Tires. Laminated
 600 x 9
 Dual Wingwheels. . . . Option
 Deck Rings to
 Protect Deck Standard